


Haitai TaiJi2.0 182

HTM570~590MH5-72NT

TOPCon Monofacial high efficiency PV module

22.84%

Module Efficiency 22.84%

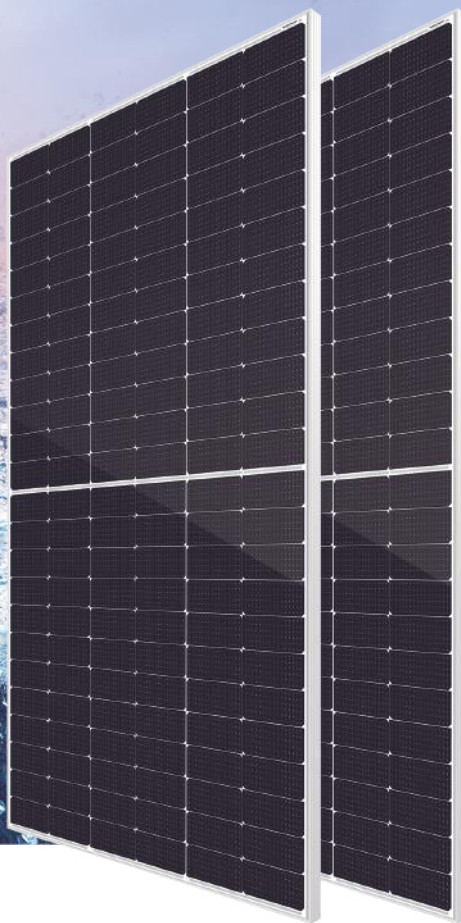

PRODUCT FEATURES



High Power Output

N-type MBB half cut technology, improve energy density, bring higher power output.



High Durability

Passed TUV Salt & Ammonia corrosion test, and 2400Pa wind load, 5400Pa snow load test, higher reliability



Better Low Light Performance

Higher power generation compare with standard module in cloudy, foggy and low light condition



Low Power Degradation

First year power degradation <1.0%, year 2-30 power degradation <0.40% each year



Low Temperature coefficient


Passivated contact cell technology for higher power generation in operating



Better Anti-LID

N-type cells with boron-oxide-free composite LID to increase module power generation

LINEAR PERFORMANCE WARRANTY

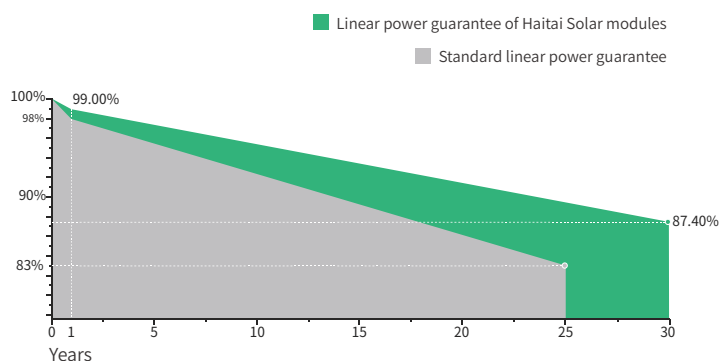

12 years product warranty



30 years linear power warranty



Linear attenuation of 0.40% per year within 30 years

CERTIFICATES

- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational health and safety management systems
- IEC62941:2019 Photovoltaic Module Manufacturer Quality Management System



Electrical Data (STC)

Maximum Power (Pmax/W)	570	575	580	585	590
Open Circuit Voltage (Voc/V)	51.89	52.04	52.19	52.34	52.49
Short Circuit Current (Isc/A)	13.73	13.81	13.89	13.97	14.05
Voltage at Maximum Power (Vmp/V)	43.61	43.76	43.91	44.06	44.21
Current at Maximum Power (Imp/A)	13.08	13.14	13.21	13.28	13.35
Module Efficiency (%)	22.07	22.26	22.45	22.65	22.84
Operating Temperature	-40° C~+85° C				
Maximum System Voltage	1000/1500V				
STC (Standard Testing Conditions): Irradiance 1000W/m ² , Cell Temperature 25°C, AM1.5					

Electrical Data (NMOT)

Maximum Power (Pmax/W)	429	433	437	441	445
Open Circuit Voltage (Voc/V)	49.29	49.44	49.59	49.72	49.81
Short Circuit Current (Isc/A)	11.23	11.3	11.37	11.45	11.53
Voltage at Maximum Power (Vmp/V)	40.54	40.69	40.84	40.92	41.01
Current at Maximum Power (Imp/A)	10.59	10.65	10.71	10.78	10.86
NMOT (Nominal Module Operating Temperature): Irradiance 800W/m ² , Ambient Temperature 20°C, AM1.5, Wind Speed 1m/s.					

Mechanical Data

Cell Type	182×91mm Mono
Cell Orientation	144(6×24)
Module Dimensions	2278×1134×35mm
Weight	28.0kg
Glass	3.2mm high transmittance, reinforced glass
Backsheet	Anti-aging film
Frame Material	Anodized aluminum alloy
Junction Box	Protection class IP68
Cable	4.0 mm ² positive pole: 200 mm negative pole: 250 mm wire length can be customized
Connector	MC4 compatible connector


Temperature Coefficients

Temperature Coefficient (Pm)	-0.300%/°C
Temperature Coefficient (Voc)	-0.250%/°C
Temperature Coefficient (Isc)	0.046%/°C
NMOT (Nominal Module Operating Temperature)	41±3°C

Packaging

Transportation methods	Number of modules per cabinet	Number of modules per pallet
40HQ container	620pcs	31pcs +31pcs

Module Dimensions (mm)

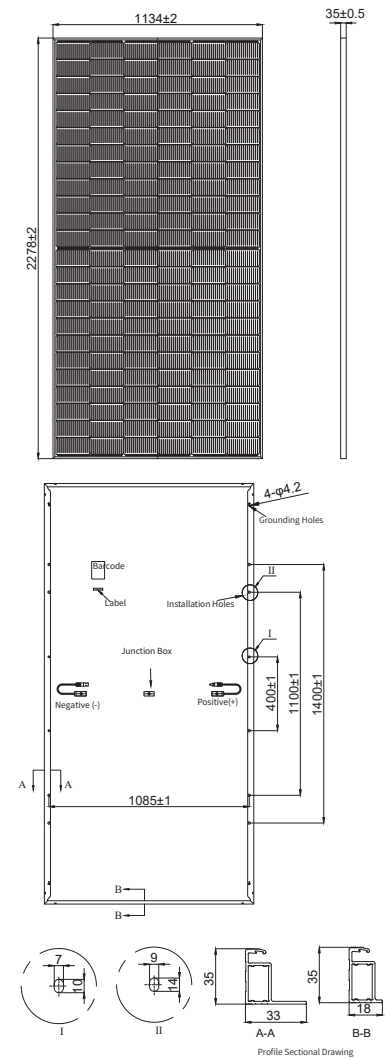

I-V Curve

